

1 Left-hand drive

(2) Right-hand drive



Airbag



Gas generator



Seat belt pretensioner



SRS control unit



Active pedestrian protection system



Gas strut / Preloaded spring



Low-voltage battery



Petrol fuel tank



Battery pack, High-voltage



High voltage power cable



High voltage component



Cable cut



Low voltage device that disconnects high voltage


Note: Please see our  $\underline{\mathsf{emergency}}\,\mathsf{response}\,\mathsf{guide}$  for more information







## 1. Identification / recognition

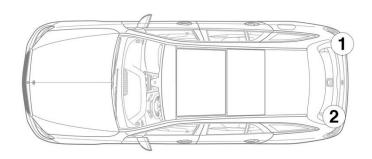








## 3. Disable direct hazards / safety regulations

Deactivation of the high-voltage system

In all other cases, the high-voltage system should be deactivated as follows:

Option 1: High-voltage disconnect

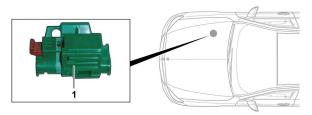













(1) Pull the release

- (2) Push the release down
- (3) Pull out the switch

## Option 2: Alternative high-voltage disconnect

The alternative high-voltage disconnect is located under the cover of the fuse box in the cockpit on the driver's side.





Remove the cover (1). Cut the cable at the marked point (2).



## Disconnecting the 12 V battery

- 1. Remove the cover from the 12-volt battery.
- 2. Disconnect the negative cable of the 12-volt battery at the screw connection and secure it against unintentional contact.