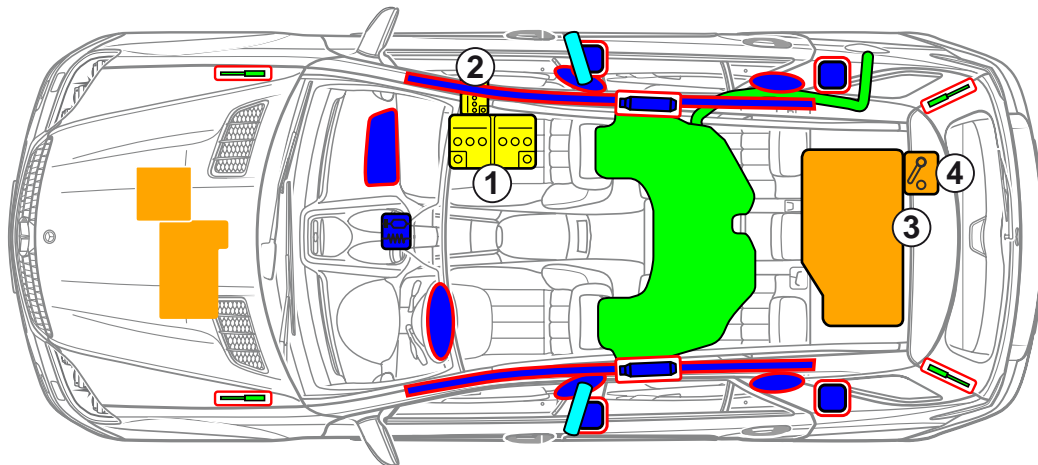
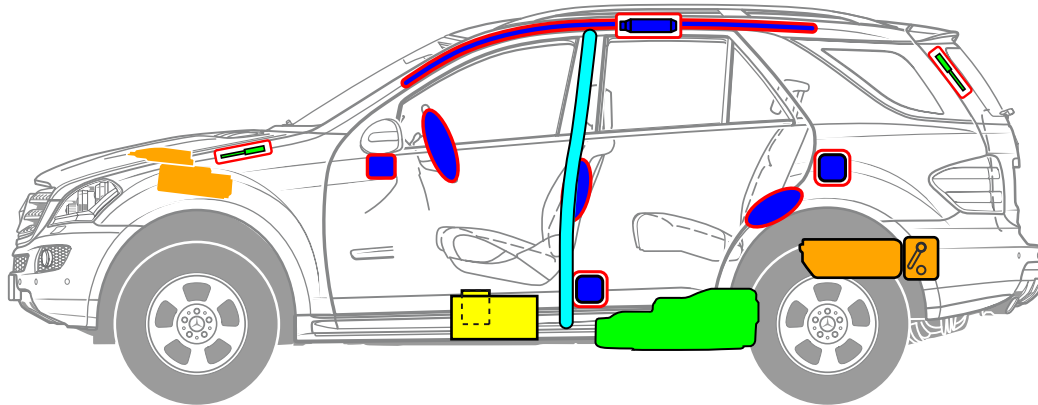















Mercedes-Benz

# M-Class HYBRID Cross-country vehicle model 164 as of 2009



- 1 Main battery (12 V)
- 2 Additional battery (12 V)
- 3 High-voltage battery
- 4 High-voltage disconnect device

 Airbag	 Gas generator	 Seat belt tensioner	 Restraint systems control unit
 Gas-filled strut	 Body reinforcement	 Fuel tank	 Battery 12 V
 High-voltage battery	 High-voltage components	 High-voltage disconnect device	




### High-voltage disconnect device

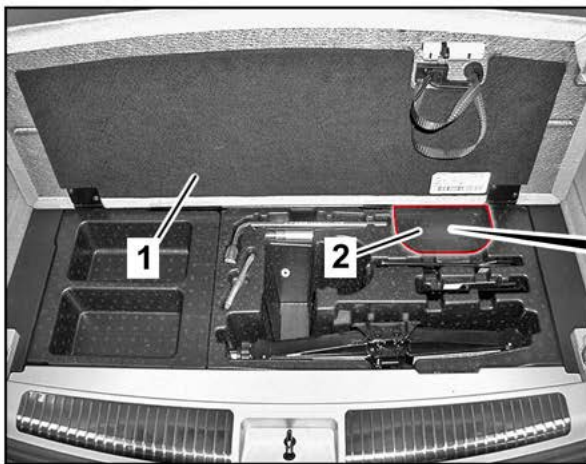The high-voltage disconnect device is located on the right at the rear of the high-voltage battery.



High-voltage disconnect device


Lift load compartment floor (1) / Remove cover (2) / Push switch (3) to the right and pull off high-voltage battery



### Vehicle identification



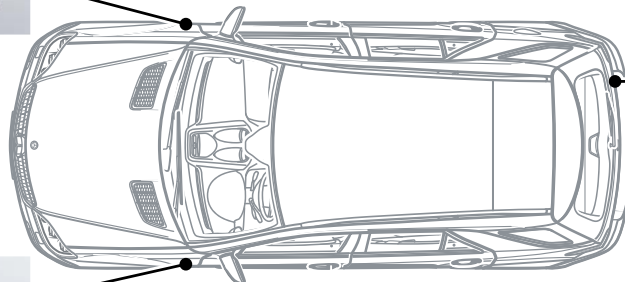Right fender



Right of liftgate



Left fender