

Note: Please see our $\underline{\mathsf{emergency}}\ \mathsf{response}\ \mathsf{guide}$ for more information














4. Access to the occupants

When rescuing the vehicle occupants, the components of the restraint systems (in particular pyrotechnic elements) must be taken into account in accordance with the information on page 1.




Steering wheel adjustment

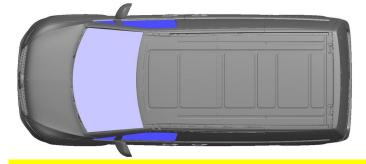



Seat adjustment (mechanical)



5. Stored energy / liquids / gases / solids






Use large volumes of water (H_2O) to extinguish a vehicle fire.

7. In case of submersion

There is no risk of voltage in the bodywork. After recovery of the vehicle:

- 1. Allow the water to drain out of the interior.
- 2. Commence deactivation of the 12 V/48 V electrical system (see Section 3).

8. Towing / transportation / storage

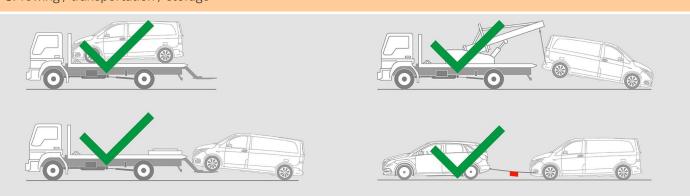





9. Important additional information

You can find more information in the Guidelines for car towing services.

