




① As of 2001



Airbag

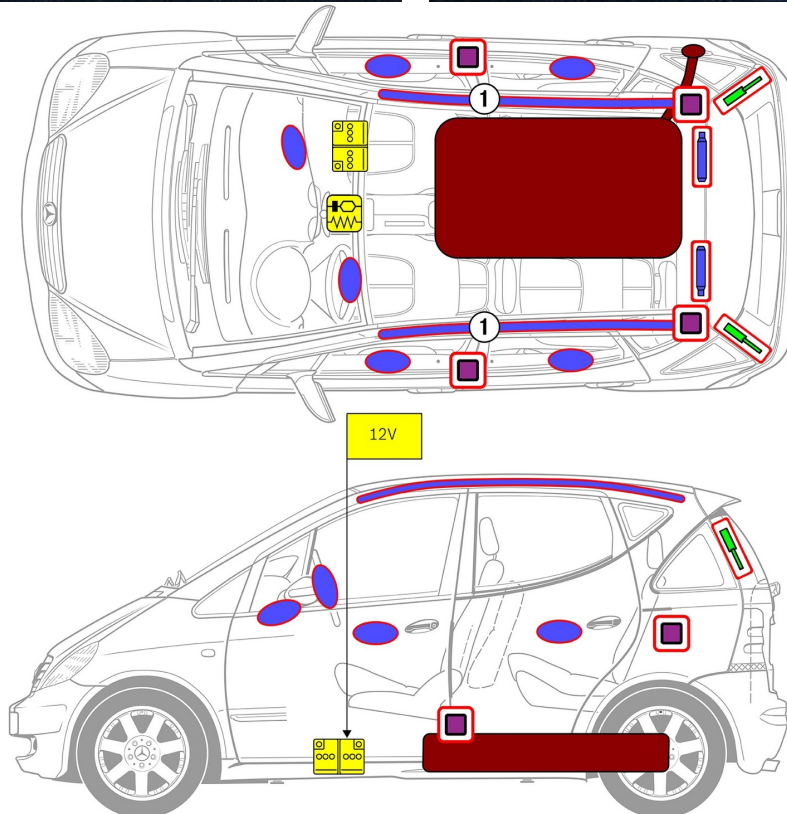

Gas generator



Seat belt pretensioner



SRS control unit



Gas strut / Pre-loaded spring





Low-voltage battery




Petrol fuel tank



1. Identification / recognition

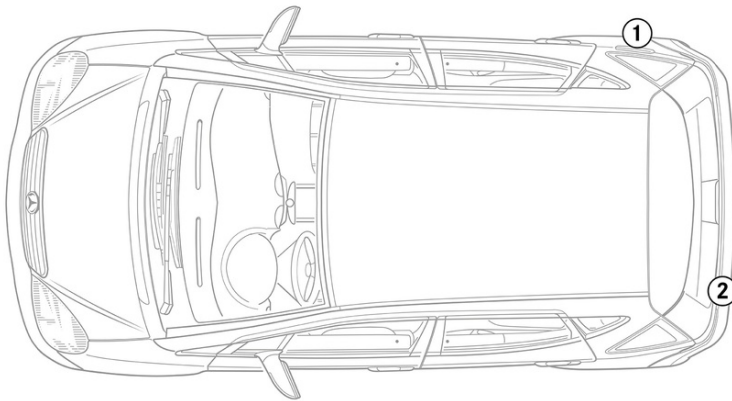

2. Immobilisation / stabilisation / lifting

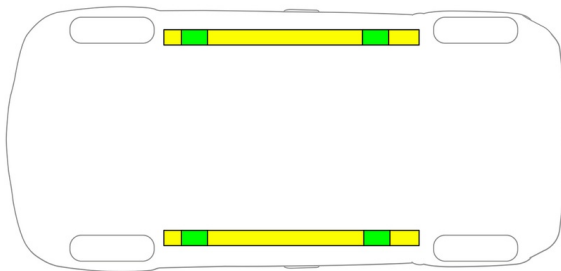

Suitable lifting points



Suitable stabilisation points on the side

3. Disable direct hazards / safety regulations



Disconnecting the 12 V battery

1. Remove the cover from the 12-volt battery.
2. Disconnect the negative cable of the 12-volt battery at the screw connection and secure it against unintentional contact.

5. Stored energy / liquids / gases / solids



6. In case of fire



Use large volumes of water (H₂O) to extinguish a vehicle fire.


7. In case of submersion

There is no risk of voltage in the bodywork. After recovery of the vehicle:

1. Allow the water to drain out of the interior.
2. Commence deactivation of the 12 V/48 V electrical system (see Section 3).



8. Towing / transportation / storage

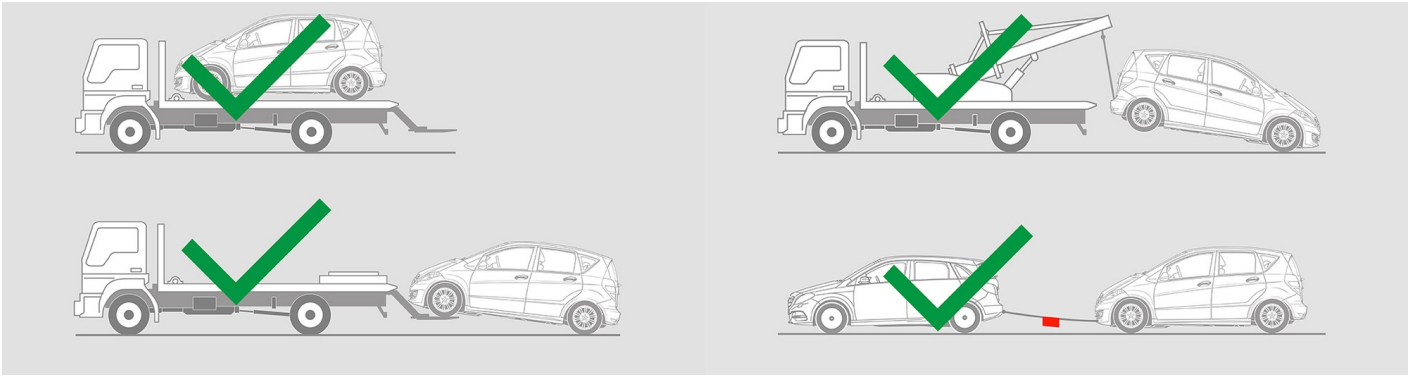

9. Important additional information

You can find more information in the [Guidelines for car towing services](#).

Note: Please see our [emergency response guide](#) for more information

10. Explanation of pictograms used



Vehicle on fuel of liquid group 1



Vehicle on fuel of liquid group 2



General warning sign



Flammable



Hazardous to human health



Corrosives



Acute toxicity



Use water to extinguish the fire



Use dry foam to extinguish the fire



Use wet foam to extinguish the fire