











- |   |                               |   |               |   |                        |   |                  |   |                                     |
|---|-------------------------------|---|---------------|---|------------------------|---|------------------|---|-------------------------------------|
|  | Airbag                        |  | Gas generator |  | Seat belt pretensioner |  | SRS control unit |  | Active pedestrian protection system |
|  | Gas strut / Pre-loaded spring |  | Warning zone  |  | Low-voltage battery    |  | Petrol fuel tank |   |                                     |






### 1. Identification / recognition




### 2. Immobilisation / stabilisation / lifting

#### Parking brake



Press the P switch on the gear selector (1). The parking brake is automatically activated.

Electric parking brake (1)

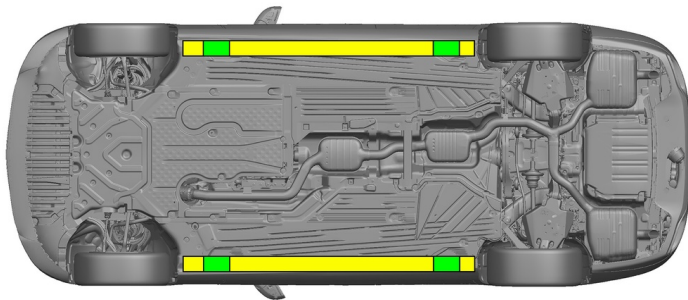

Suitable lifting points



Suitable stabilisation points on the side





Additional deformation of the door sills and the underbody (e.g. through support with hydraulic equipment) must be avoided during the rescue.

### 3. Disable direct hazards / safety regulations

#### Switch off the ignition:

1. Press the START/STOP button without actuating the service brake.
2. Keep the electronic vehicle key at a distance of at least 5 m.



The absence of engine noise does not mean that the vehicle is switched off.



A restart is possible until the vehicle is switched off.



#### Disconnecting the 12 V/48 V battery

1. Remove the cover from the 12/48-volt battery in the engine compartment.
2. Disconnect the negative cable of the 12/48-volt battery at the screw connection and secure it against unintentional contact.



#### Disconnecting the 12/48 V battery


1. Remove the cover from the 12/48-volt battery in the boot.
2. Disconnect the negative cable of the 12/48-volt battery at the screw connection and secure it against unintentional contact.




The passive safety systems (airbags and seat belt pretensioners) are deactivated.

**4. Access to the occupants**


When rescuing the vehicle occupants, the components of the restraint systems (in particular pyrotechnic elements) must be taken into account in accordance with the information on page 1.

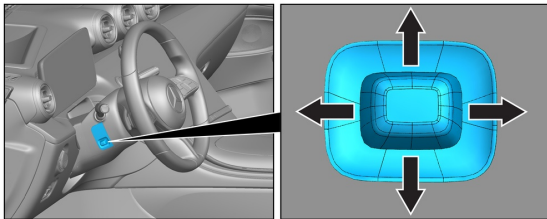


Steering wheel adjustment

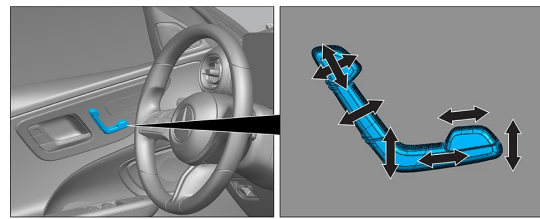


Seat adjustment (electric)

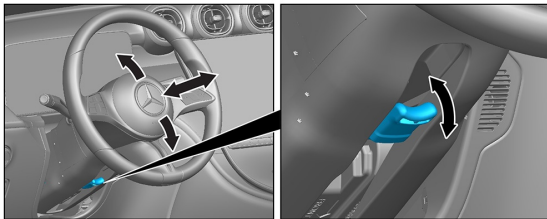

Steering wheel adjustment

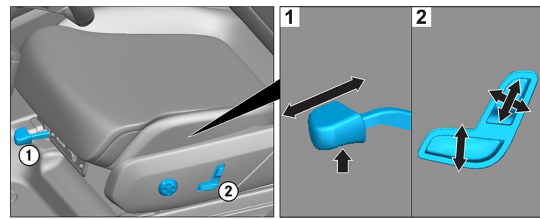

Seat adjustment (electric)

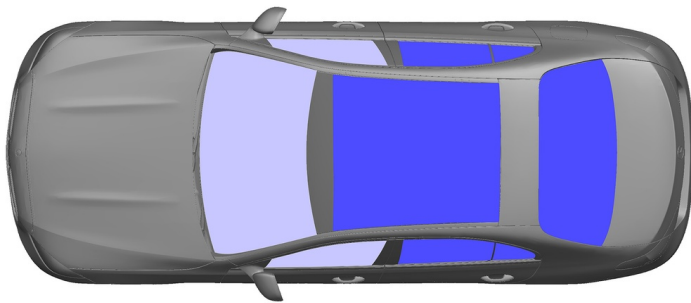

VSG: Laminated safety glass  
 ESG: Tempered glass

**5. Stored energy / liquids / gases / solids**

		12 V/ 48 V
		66 L
		66 L
		610 ± 10 g

**6. In case of fire**



Use large volumes of water (H<sub>2</sub>O) to extinguish a vehicle fire.


**7. In case of submersion**

There is no risk of voltage in the bodywork. After recovery of the vehicle:

1. Allow the water to drain out of the interior.
2. Commence deactivation of the 12 V/48 V electrical system (see Section 3).



### 8. Towing / transportation / storage

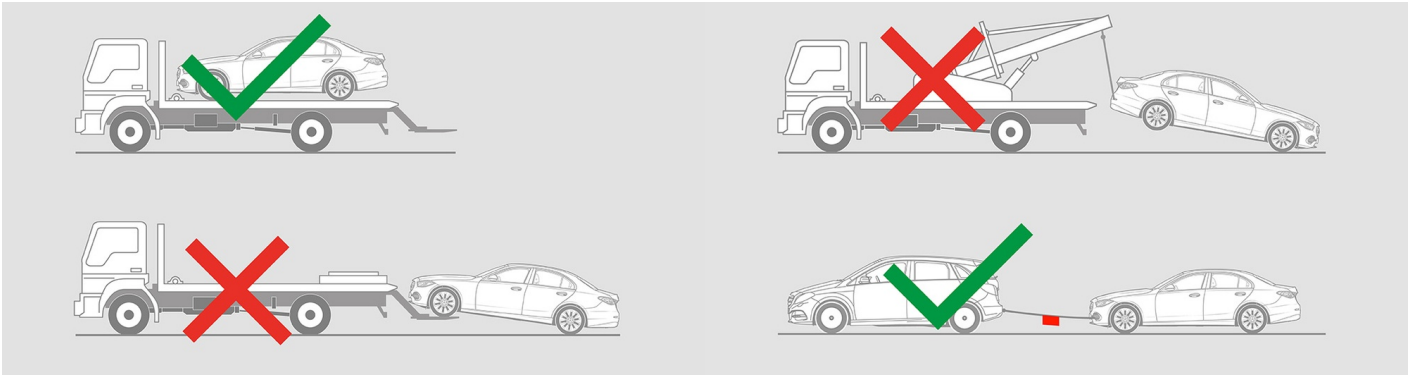

### 9. Important additional information

You can find more information in the [Guidelines for car towing services](#).

Note: Please see our [emergency response guide](#) for more information

### 10. Explanation of pictograms used

	Vehicle on fuel of liquid group 1		Vehicle on fuel of liquid group 2		General warning sign		Flammable
	Hazardous to the human health		Corrosives		Acute toxicity		Explosive
	Use water to extinguish the fire		Use dry foam to extinguish the fire		Use wet foam to extinguish the fire		Bonnet
	Boot		Remove smart key		Air-conditioning component		Warning; low temperature