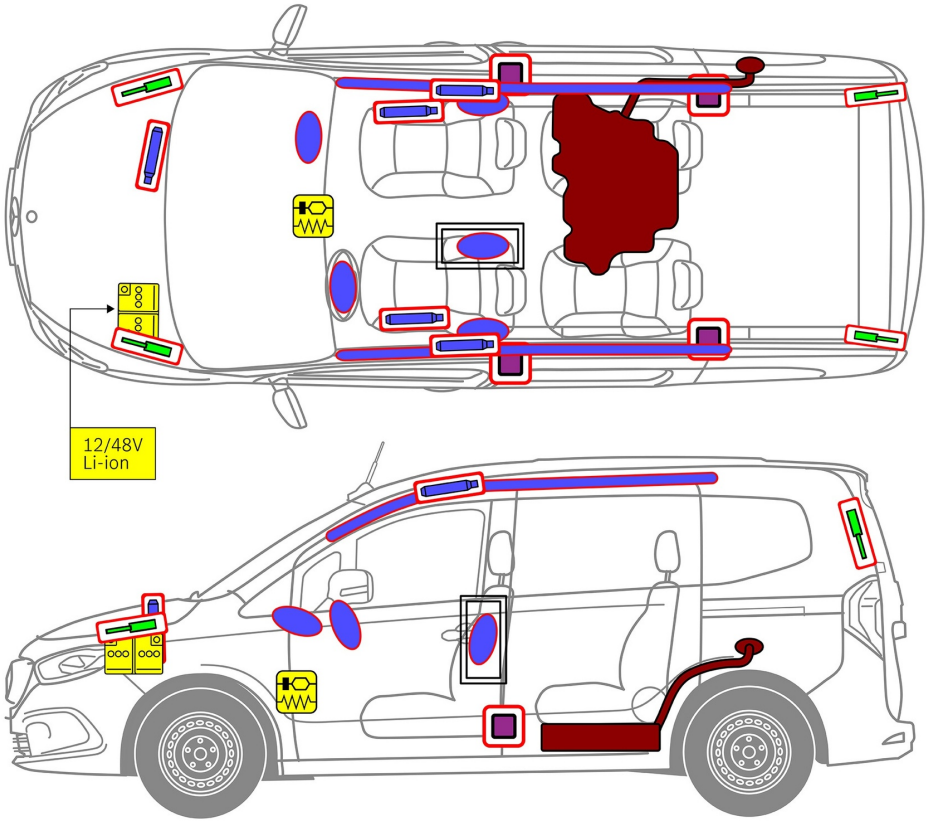

Airbag

Gas generator

Seat belt pretensioner

SRS control unit

Gas strut / Preloaded spring

Warning zone

Low-voltage battery

Petrol fuel tank

1. Identification / recognition

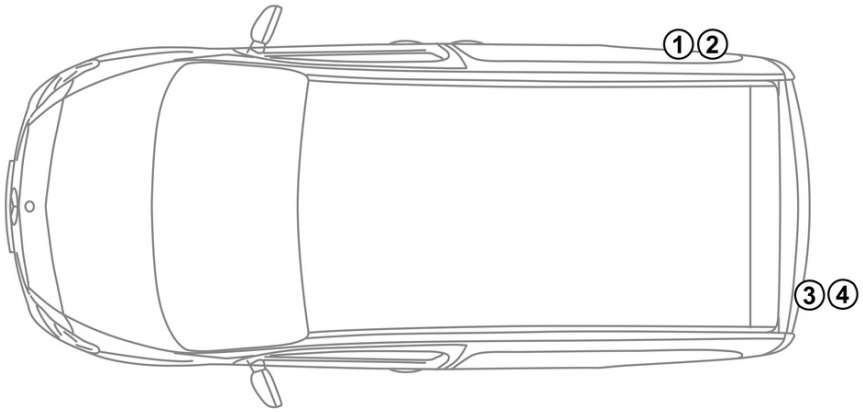





③ ④

CITAN T180

2. Immobilisation / stabilisation / lifting

Parking brake – One of the following variants is installed, depending on the vehicle type:

1. Move the selector lever to position P.
2. Move the selector lever to position N.

Parking brake – One of the following variants is installed, depending on the vehicle type:



1. Electric parking brake
2. Parking brake pedal
3. Release the parking brake button
4. Parking brake lever
5. Release the parking brake lever button

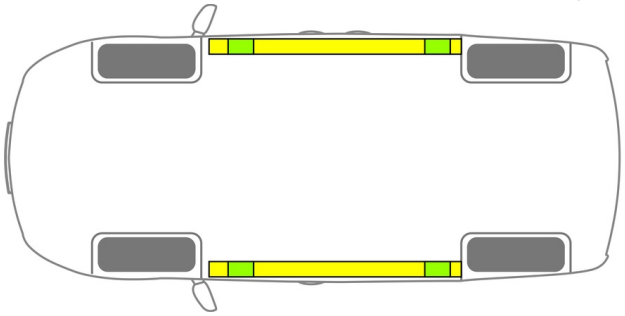

Suitable lifting points

Suitable stabilisation points on the side

Additional deformation of the door sills and the underbody (e.g. through support with hydraulic equipment) must be avoided during the rescue.

3. Disable direct hazards / safety regulations



Switch off the ignition:

1. Turn the ignition key anti-clockwise in the ignition lock and remove it from the ignition lock.
2. Remove the ignition key from the vehicle.

In vehicles with automatic transmission, the ignition key can only be removed when the gear selector is in the “P” position.

Switch off the ignition:

1. Press the START/STOP button without actuating the service brake.
2. Keep the electronic vehicle key at a distance of at least 5 m.



The absence of engine noise does not mean that the vehicle is switched off.

A restart is possible until the vehicle is switched off.

Disconnecting the 12 V/48 V battery

1. Remove the cover from the 12/48-volt battery in the engine compartment.
2. Disconnect the negative cable of the 12/48-volt battery at the screw connection and secure it against unintentional contact.

The passive safety systems (airbags and seat belt pretensioners) are deactivated.

4. Access to the occupants

When rescuing the vehicle occupants, the components of the restraint systems (in particular pyrotechnic elements) must be taken into account in accordance with the information on page 1.

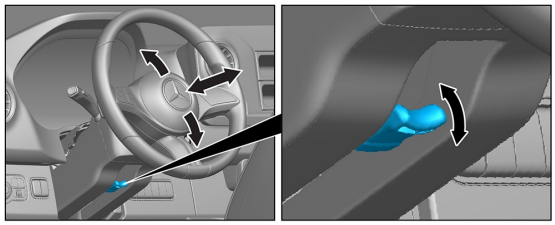

Steering wheel adjustment

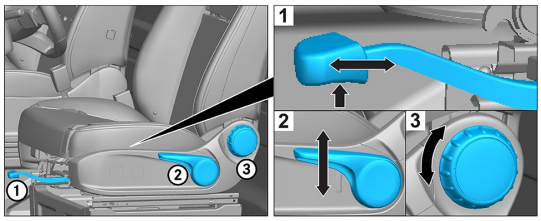

Seat adjustment (mechanical)

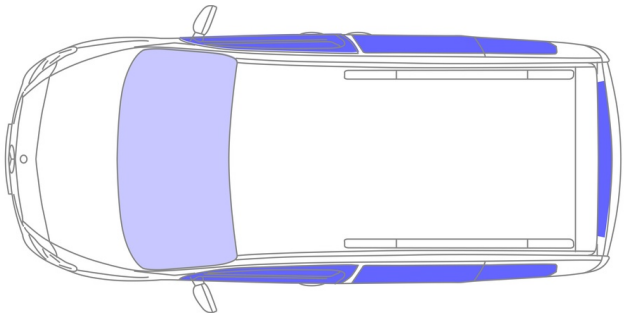

VSG: Laminated safety glass

ESG: Tempered glass

5. Stored energy / liquids / gases / solids

6. In case of fire

Use large volumes of water (H_2O) to extinguish a vehicle fire.

7. In case of submersion

There is no risk of voltage in the bodywork. After recovery of the vehicle:

1. Allow the water to drain out of the interior.
2. Commence deactivation of the 12 V/48 V electrical system (see Section 3).

8. Towing / transportation / storage

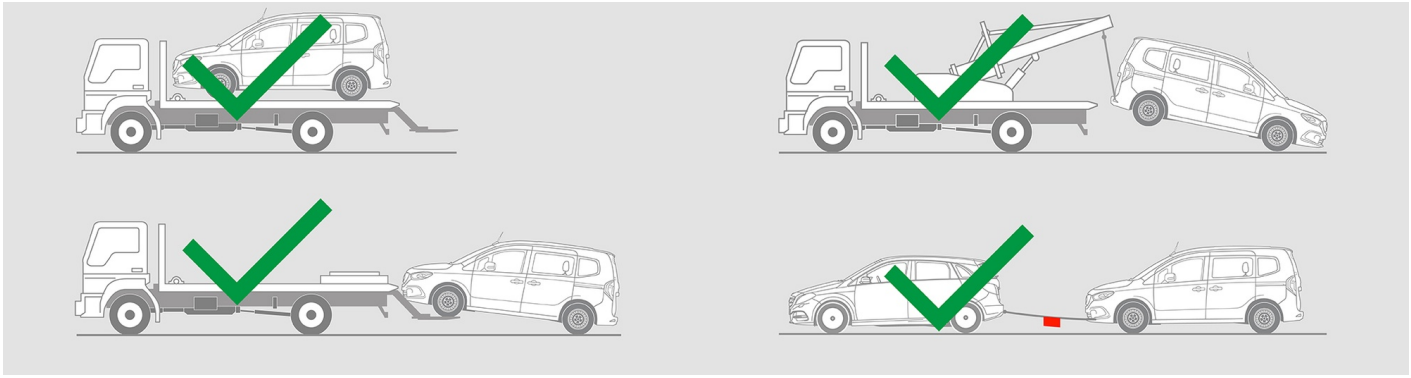

9. Important additional information

You can find more information in the Guidelines for car towing services.

Note: Please see our emergency response guide for more information

10. Explanation of pictograms used

Vehicle on fuel of liquid group 1

Vehicle on fuel of liquid group 2

General warning sign

Flammable

Hazardous to the human health

Corrosives

Acute toxicity

Use water to extinguish the fire

Use dry foam to extinguish the fire

Use wet foam to extinguish the fire

Bonnet

Boot

Remove smart key